

Digital Video Interfacing Products

AT8USB

DVB-T (COFDM) Terrestrial Input
6, 7 and 8 MHz Bandwidth
Receiver & Recorder
Small Pocket size
No External Power Supply needed



Standard Features

- **High Speed USB 2.0.**
- Windows XP, Vista, Win 7 (64bit) Drivers + SDK.
- Linux Drivers & sample application.
- Accompanied by DVSStaion3, Alitronika's Integrated TS Player, Recorder & Real Time Quick Analyser Software.
- Supports DVB Standards **A1010Rev1** and **EN50083**.

Input

- **DVB-T Compliant COFDM Reception.**
- Input Frequency Range:
 - UHF: 470 MHz to 862 MHz.
 - VHF: 174 MHz to 230 MHz
- Modulation Modes: QPSK, 16QAM, 64QAM.
- COFDM Spectrum: DVB-T and DTG compliant.
- Integrated RF Loop Through output.
- Sync, Error & Code Violation Detection.
- Support for Time Stamping, PID filtering.
- Supports 188 /204 byte Packet Sizes.

Application

Targeted for Digital Video Professionals, Sophisticated End Users and OEMs the AT8USB is an ideal solution for A number of applications such as:

- Development Tools.
- DVB to IP or IP to DVB Gateway.
- Transport Stream Recording.
- Transport Stream Analysing
- Transport Stream Monitoring.
- Software Based decoding.
- DVB-T TS for Tans-modulation into DVB-S or DVB-C.



Specifications

On Board Buffer: 8Mbytes
RF Tuner Connector: 75 Ohms Female IEC Type
RF Loop Connector: 75 Ohms Male IEC Type
Input Frequency Range:

- UHF:** 470 MHz to 862 MHz
- VHF:** 174MHz to 230MHz

Channel Bandwidth: 7 & 8 MHz
Channel Assignment: C.C.I.R Channel & +/- 166.666KHz offset
OFDM Spectrum: 2k & 8k carrier
Hierarchical & non-hierarchical
Standards: DVB-T and DTG compliant
Modulation Modes: QPSK, 16QAM and 64QAM
Guard Interval Modes: 1/32, 1/16, 1/8 and 1/4
active symbol duration
FEC Modes: Rate 1/2, 2/3, 3/4 and 7/8


1 GENERAL DESCRIPTION

A member of Alitronika's state of art digital video interfacing products.

The AT8USB is a USB based interface device suitable for Recording and Analyzing of DVB Transport Streams.

2 BLOCK DIAGRAM

FIG4 illustrates the block diagram of the AT8USB device. The device communicates with the USB bus via the USB interface device. The RF signal is demodulated and then de-coded before entering the PC via the main controller and the USB bus as Full TS files. The main controller transfers the incoming Transport Stream to the application for recording via the hardware buffer, the USB controller and software buffer.

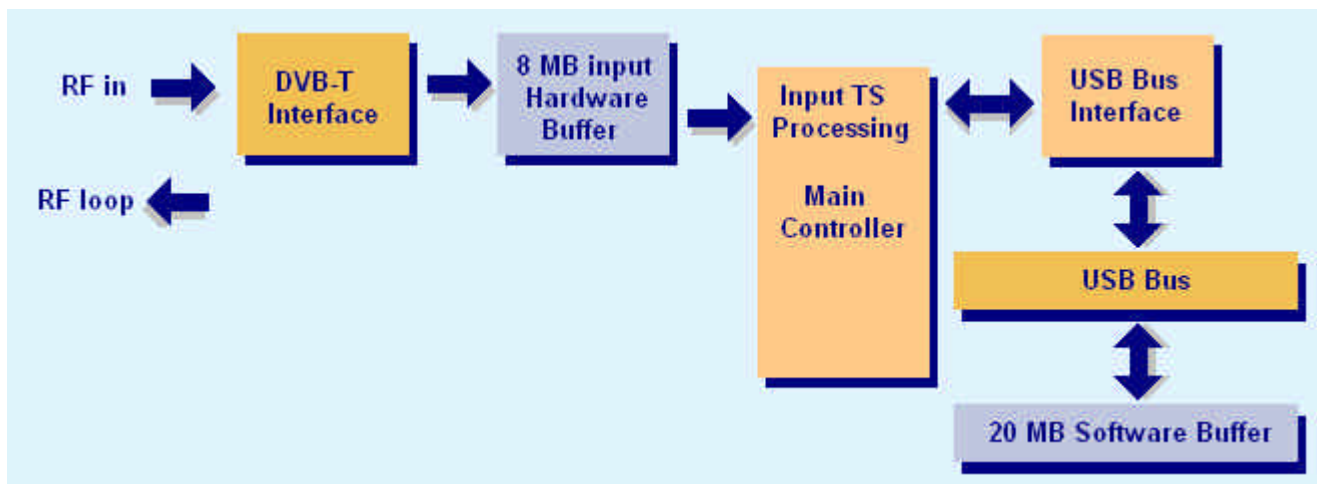

3 EXTERNAL INTERFACES

The external interfaces for the AT8USB are shown. There are two 75 Ohms IEC type connectors for the RF input and output of DVB-C as well as USB connector.

The three LEDs in front of the unit function as follows:

PWR - Top LED	Power LED	ON = power is on, OFF = power is off
CD - Middle LED	Record LED	ON = Device is Recording TS Flashing = Record not activated

In Record mode this LED indicates that a Carrier has been detected.

LCK - Bottom LED	LOCK LED	ON = device is locked to TS Flashing = no lock has been achieved
-------------------------	----------	---

In Record mode this LED indicates that the device has locked into incoming TS.




4 APPLICATION

Targeted for digital video professionals, sophisticated end users and OEMs the AT8USB is an ideal solution for a number of applications such as, development tools, universal interface for MPEG-II Transport Stream Receiving & recording from DVB-T (Terrestrial) source, software based MPEGII decoders & many other applications.


5 Software Application, DVStation3

5.1 - DVStation3: All of Alitronika devices are supported by DVStation3, Alitronika's **FREE** Transport Stream Player, Recorder, Analyser & converter application software. Please refer to DVStation3 specification and User Manual on our website for more information about DVStation3. Even better please download it from our website & try it out. It works in DEMO mode without any Alitronika devices.


Record Screen

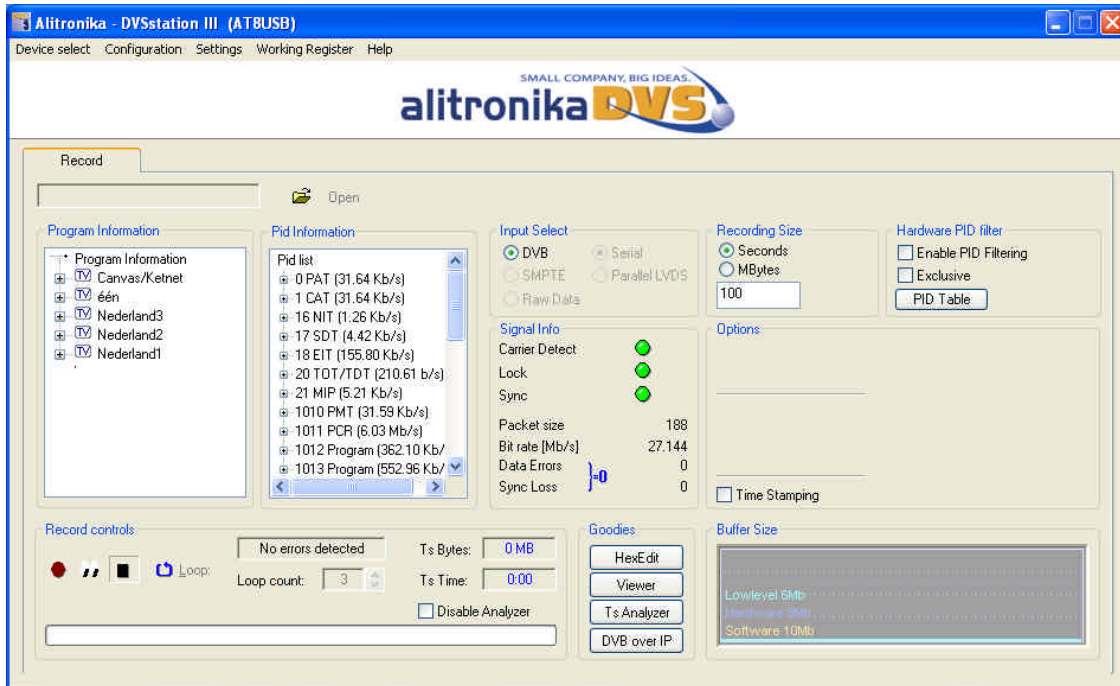

Tuner Settings

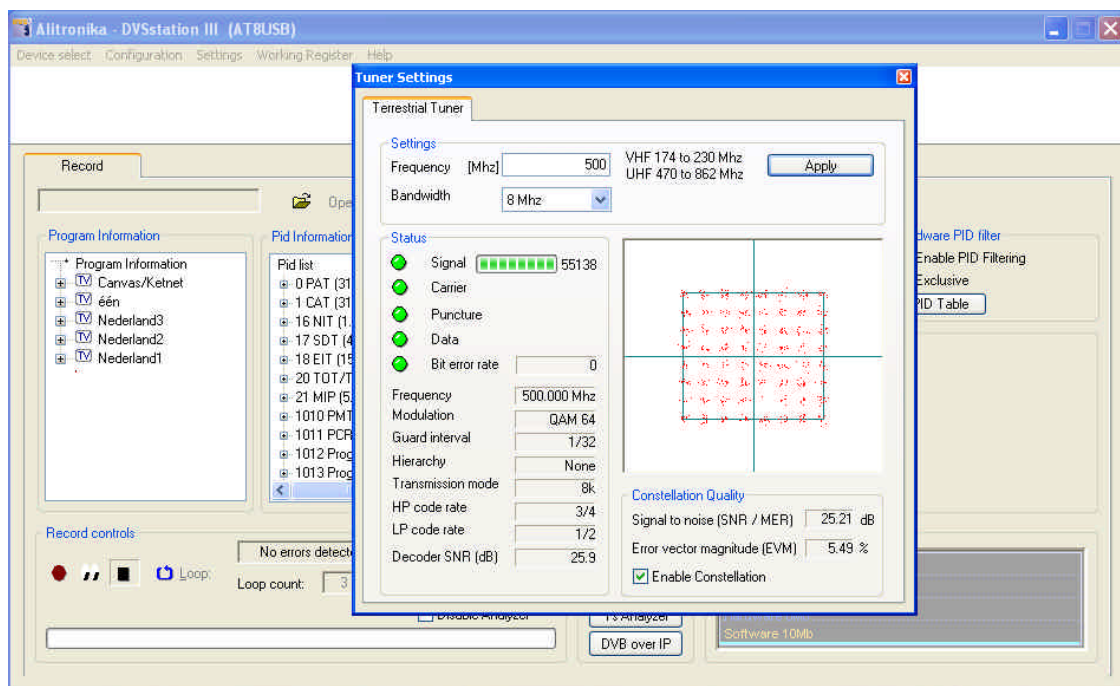

Video Viewer

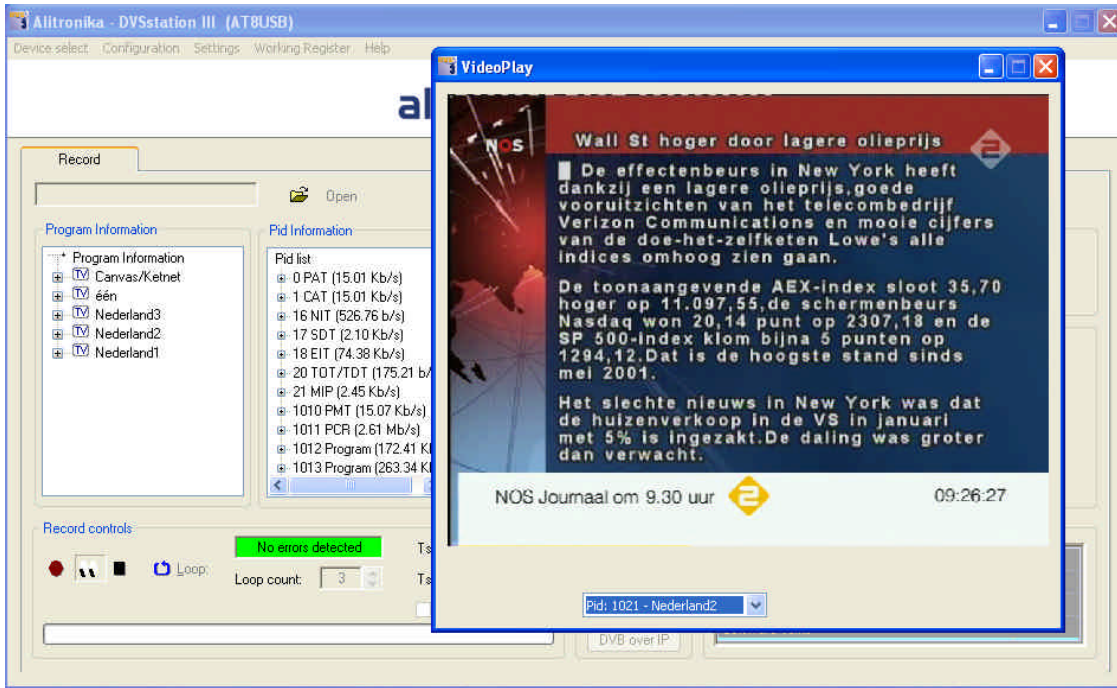

Alitronika DVS continually strives to improve its products to keep up with ever increasing demands of the broadcasting industry.

Therefore Alitronika DVS reserves the right to make changes in its product specifications at any time without notice. The reader is cautioned to verify that the specification documents are current before placing orders.

Information furnished in this document is believed to be accurate and reliable.

However, Alitronika DVS assumes no responsibility for any errors that may appear in any of its documents. Furthermore, Alitronika DVS assumes no responsibility for the consequence of use of such information or for any infringement of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Alitronika DVS.

This document supersedes and replaces all information previously supplied.

Alitronika DVS makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Alitronika DVS assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Conformity to standards, all operating parameters and compliance to regulations must be validated for each customer application by customer's technical experts.

Alitronika DVS products are not authorized for use as critical components in any systems such as life supporting systems.